



THE COLORS OF

Dakota Granite[™] EST. 1925

THE DAKOTA MAHOGANY PEOPLE.

ARCHITECTURAL DIVISION



This color representations shown is intended to represent the granite color as closely as possible. Natural stone may vary from these representations.



DAKOTA MAHOGANY™

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 22,500 PSI

Modules of Rupture: 2,820 PSI

Water Absorption: 0.106% By Weight
0.288% By Volume

Flexural Strength: 1,598 PSI

Abrasion Index: 57.08 Ha

Type of Stone: Granite

Quarry Location: Milbank, SD U.S.A.



EST. 1925
Dakota Granite™
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

DAKOTA MAHOGANY™ - SELECT

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.



<u>TEST DATA</u>	
Compressive Strength:	22,500 PSI
Modules of Rupture:	2,820 PSI
Water Absorption:	0.106% By Weight 0.288% By Volume
Flexural Strength:	1,598 PSI
Abrasion Index:	57.08 Ha
Type of Stone:	Granite
Quarry Location:	Milbank, SD U.S.A.



Dakota Granite EST. 1925™
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

DAKOTA MAHOGANY™ - RUSHMORE

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.



<u>TEST DATA</u>	
Compressive Strength:	22,500 PSI
Modules of Rupture:	2,820 PSI
Water Absorption:	0.106% By Weight 0.288% By Volume
Flexural Strength:	1,598 PSI
Abrasion Index:	57.08 Ha
Type of Stone:	Granite
Quarry Location:	Milbank, SD U.S.A.



Dakota Granite EST. 1925™
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

DAKOTA MAHOOGANY™ - SUNSET

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 22,500 PSI

Modules of Rupture: 2,820 PSI

Water Absorption: 0.106% By Weight
0.288% By Volume

Flexural Strength: 1,598 PSI

Abrasion Index: 57.08 Ha

Type of Stone: Granite

Quarry Location: Milbank, SD U.S.A.



EST. 1925
Dakota Granite™
THE DAKOTA MAHOOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

DAKOTA MAHOGANY™ - WHETSTONE

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 22,500 PSI

Modules of Rupture: 2,820 PSI

Water Absorption: 0.106% By Weight
0.288% By Volume

Flexural Strength: 1,598 PSI

Abrasion Index: 57.08 Ha

Type of Stone: Granite

Quarry Location: Milbank, SD U.S.A.



EST. 1925
Dakota Granite™
THE DAKOTA MAHOGANY PEOPLE.




PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

DAKOTA MAHOGANY™ - BROWN VELVET

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

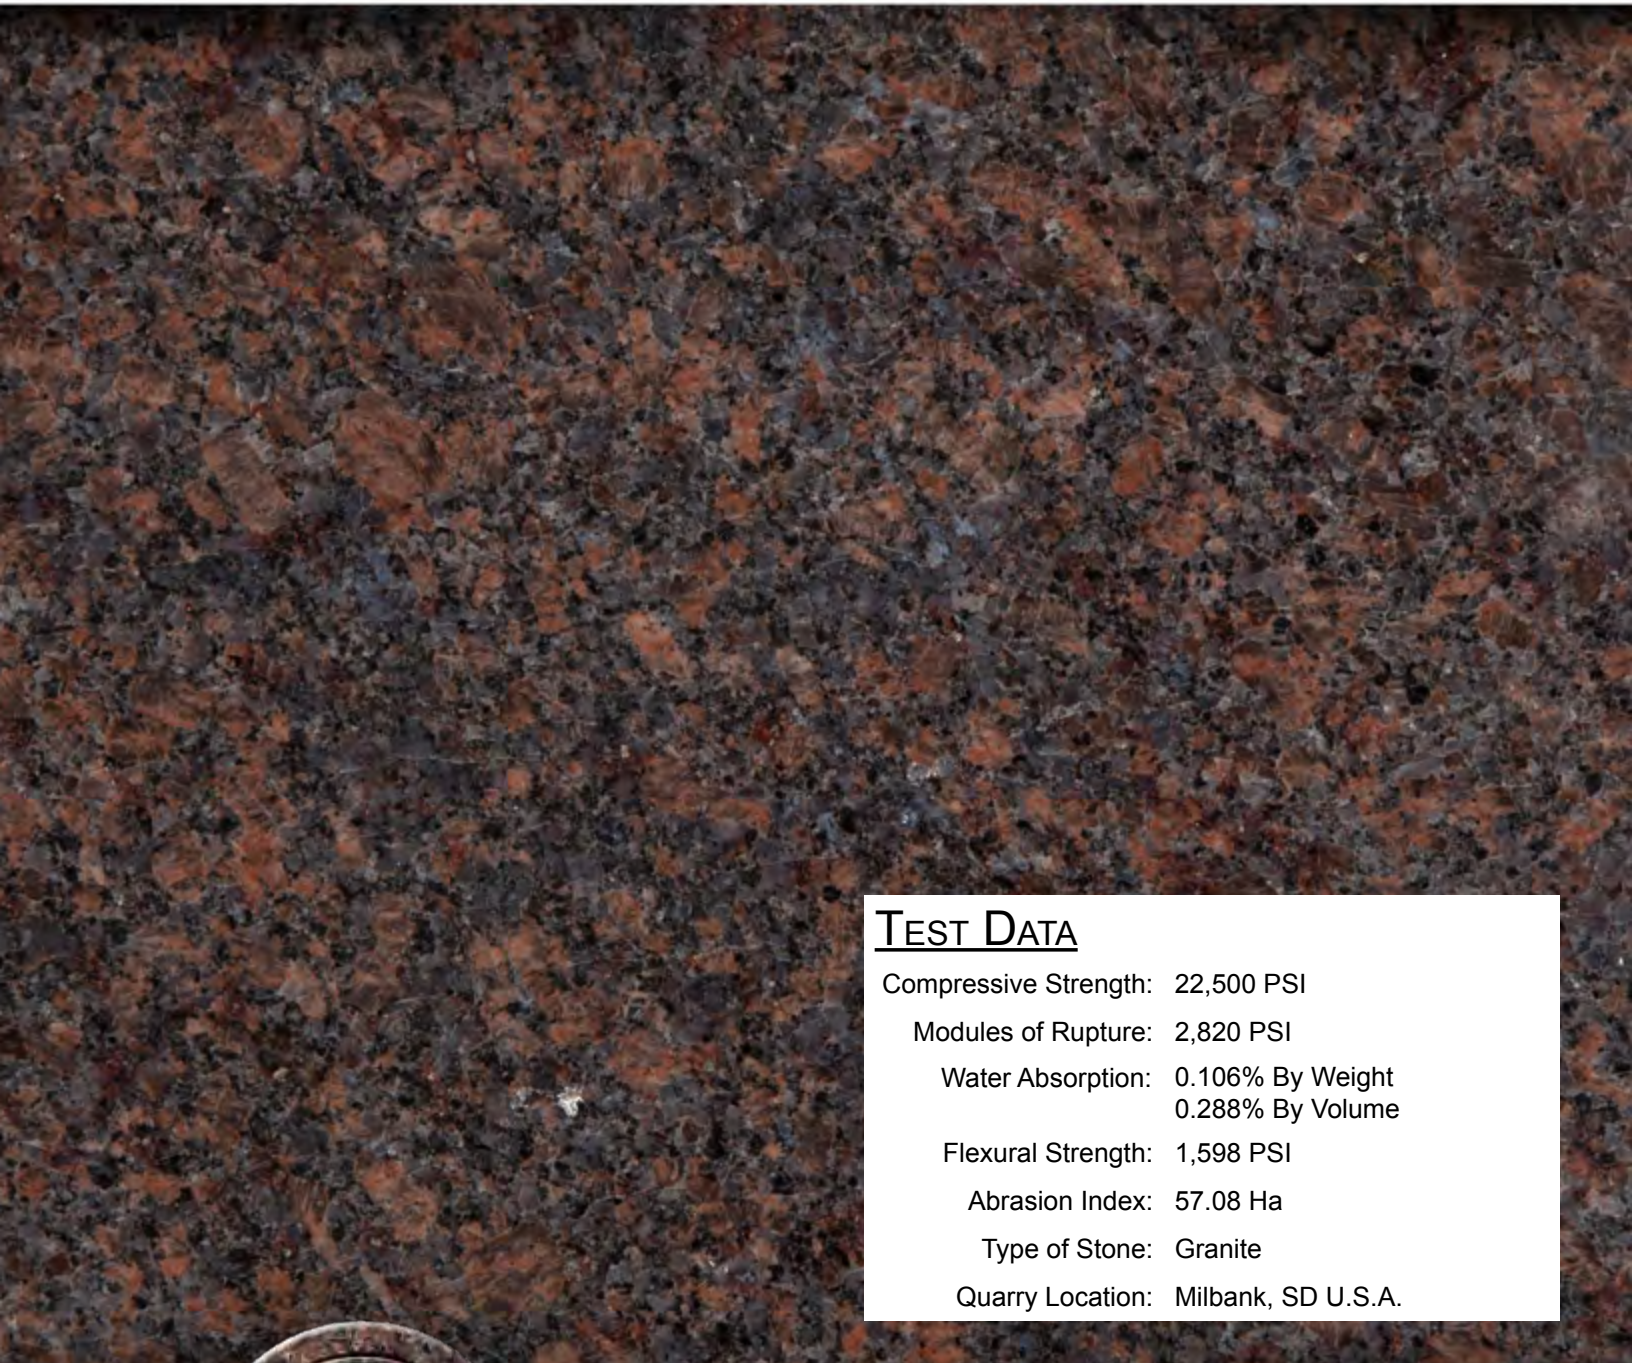

TEST DATA

Compressive Strength:	22,500 PSI
Modules of Rupture:	2,820 PSI
Water Absorption:	0.106% By Weight 0.288% By Volume
Flexural Strength:	1,598 PSI
Abrasion Index:	57.08 Ha
Type of Stone:	Granite
Quarry Location:	Milbank, SD U.S.A.



EST. 1925
Dakota Granite™
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

AMERICAN BOUQUET

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 26,500 PSI

Modules of Rupture: 2,800 PSI

Water Absorption: 0.100% By Weight

Flexural Strength: 2,300 PSI

Abrasion Index: 35.50 Ha

Type of Stone: Granite

Quarry Location: Milbank, SD U.S.A.



Dakota Granite[™] EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

AMERICAN ROSE

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 26,500 PSI

Modules of Rupture: 2,800 PSI

Water Absorption: 0.100% By Weight

Flexural Strength: 2,300 PSI

Abrasion Index: 35.50 Ha

Type of Stone: Granite

Quarry Location: Milbank, SD U.S.A.



EST. 1925
Dakota Granite[™]
THE DAKOTA MAHOGANY PEOPLE.




PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

BELLINGHAM

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

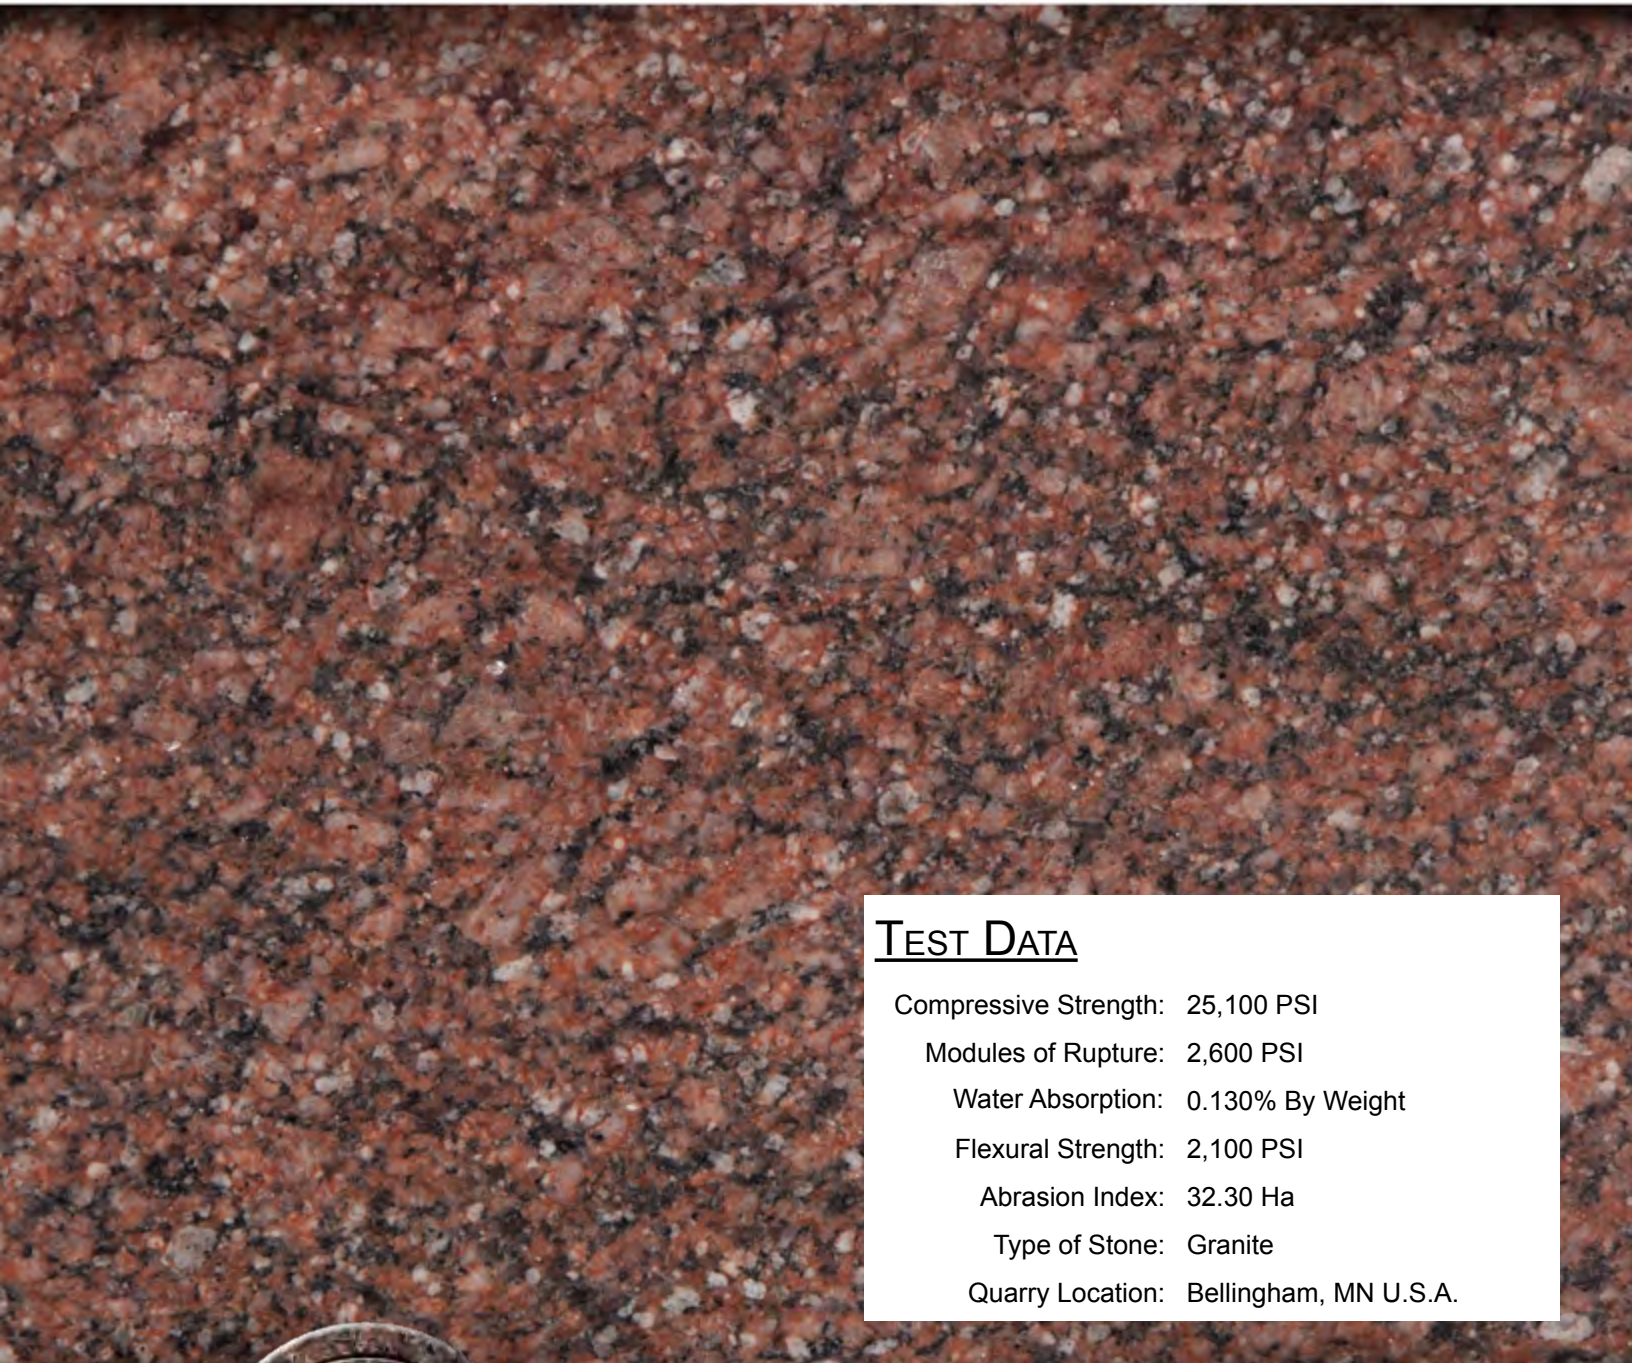

TEST DATA

Compressive Strength: 25,100 PSI
Modules of Rupture: 2,600 PSI
Water Absorption: 0.130% By Weight
Flexural Strength: 2,100 PSI
Abrasion Index: 32.30 Ha
Type of Stone: Granite
Quarry Location: Bellingham, MN U.S.A.



Dakota Granite EST. 1925™
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

SILVER CLOUD

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 28,386 PSI

Modules of Rupture: 1,646 PSI

Water Absorption: 0.20% By Volume

Flexural Strength: 1,753 PSI

Abrasion Index: 295.95

Type of Stone: Granite

Quarry Location: Stone Mountain, GA



*Dakota Granite*TM EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

MORNING ROSE

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 23,900 PSI

Density: 162.4 lbs/ft³

Water Absorption: 0.180% By Weight

Flexural Strength: 2,342 PSI

Abrasion Index: 72.00 Ha

Type of Stone: Granite

Quarry Location: Ontario, Canada



Dakota Granite[™] EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

WISCONSIN RED

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 31,500 PSI

Density: 163 lbs/ft³

Water Absorption: 0.10% By Weight

Flexural Strength: 2,260 PSI

Abrasion Index: 120.00 Ha

Type of Stone: Granite

Quarry Location: Wausau, WI U.S.A.



Dakota Granite[™] EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

MEDIUM BARRE

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 23,645 PSI

Modules of Rupture: 2,393 PSI

Water Absorption: 0.21% By Weight

Flexural Strength: 2,172 PSI

Abrasion Index: 55.2 Ha

Type of Stone: Granite

Quarry Location: Barre, Vermont U.S.A.



Dakota Granite EST. 1925™
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

BAHAMA BLUE

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 24,923 PSI

Density: 169.18 lbs/ft³

Water Absorption: 0.11% By Weight

Flexural Strength: 2,234 PSI

Abrasion Index:

Type of Stone: Granite

Quarry Location: India



Dakota Granite[™] EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

BLUE PEARL

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.



TEST DATA

Compressive Strength: 24,022 PSI

Density: 163.92 lbs/ft³

Water Absorption: 0.18% By Weight

Flexural Strength: 2,024 PSI

Abrasion Index: 73.21 Ha

Type of Stone: Granite

Quarry Location: Larvik, Norway



*Dakota Granite*TM EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

MEDIUM BLACK

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 35,525 PSI

Density: 182.29 lbs/ft³

Water Absorption: 0.14% By Weight

Flexural Strength: 3,770 PSI

Abrasion Index: 1.3 mm

Type of Stone: Gabbro

Quarry Location: Rustenburg, South Africa



*Dakota Granite*TM EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

AMERICAN BLACK

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength:

Density:

Water Absorption:

Flexural Strength:

Abrasion Index:

Type of Stone: Granite

Quarry Location:



Dakota Granite[™] EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

PREMIUM BLACK

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 33,060 PSI

Density: 190.0 lbs/ft³

Water Absorption: 0.11% By Weight

Flexural Strength: 4,524 PSI

Abrasion Index: 93.91 Ha

Type of Stone: Gabbro

Quarry Location: Africa



*Dakota Granite*TM EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

PARADISO

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 29,162 PSI

Density: 167.93 lbs/ft³

Water Absorption: 0.26% By Weight

Flexural Strength: 1,830 PSI

Abrasion Index:

Type of Stone: Granite

Quarry Location: India



Dakota Granite[™] EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

CHINA BLACK

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 25,230 PSI

Density: 192.0 lbs/ft³

Water Absorption: 0.05% By Weight

Flexural Strength: 4,896 PSI

Abrasion Index: 99.9 Ha

Type of Stone: Gabbro

Quarry Location: Shanzi Provice, China



*Dakota Granite*TM EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

CHINA GRAY

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.



<u>TEST DATA</u>	
Compressive Strength:	25,602 PSI
Modules of Rupture:	
Water Absorption:	0.03% By Weight
Flexural Strength:	2,450 PSI
Abrasion Index:	
Type of Stone:	Gabbro
Quarry Location:	China



Dakota Granite[™] EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

CHINA MIST

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 22,292 PSI

Modules of Rupture: 2,929 PSI

Water Absorption: 0.02% By Weight

Flexural Strength: 1,995 PSI

Density: 174.18 PCF

Type of Stone: Gabbro

Quarry Location: China



Dakota Granite EST. 1925™
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

CHINA PINK

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 34,480 PSI

Density: 166 lbs/ft³

Water Absorption: 0.11% By Weight

Flexural Strength: 2,450 PSI

Abrasion Index: 54.00 Ha

Type of Stone: Gabbro

Quarry Location: China



Dakota Granite[™] EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.

CHINA EVERGREEN

This color representation shown is intended to represent the granite color as closely as possible. Natural stone may vary from this representation.

TEST DATA

Compressive Strength: 35,694 PSI

Modules of Rupture:

Water Absorption: 0.09% By Weight

Flexural Strength: 14,508 PSI

Density: 186.66 PCF

Type of Stone: Gabbro

Quarry Location: China



*Dakota Granite*TM EST. 1925
THE DAKOTA MAHOGANY PEOPLE.



PO BOX 1351 • MILBANK, SD 57252 • 800.843.3333 PHONE • 800.338.5346 FAX • WWW.DAKOTAGRANITE.COM



These specimens were tested in accordance with ASTM Methods C170-06, C99-06, C97-02, C880-06, C241-05 by the United States Testing Company, Inc.