


DAKOTA GRANITE

Granite Blocks & Slabs

The Granite People
SINCE 1925

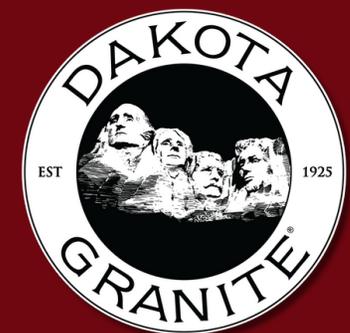

DAKOTA MAHOGANY®






Dakota Granite® is proud of our domestically produced **Dakota Mahogany®**. Dakota Mahogany® is quarried near Milbank, South Dakota, and continues to be the mahogany granite by which all other granites are measured.

QUARRIED SUSTAINABLY IN MILBANK
SOUTH DAKOTA



DAKOTA MAHOGANY[®]

BLOCKS

MONUMENTAL	90/10	80/20	60/40	<50/50
				
<hr/> \$/CUBIC FOOT	<hr/> \$/CUBIC FOOT	<hr/> \$/CUBIC FOOT	<hr/> \$/CUBIC FOOT	<hr/> \$/CUBIC FOOT
\$55.25	\$48	\$39	\$29.50	\$20.50

**FRACTIONS REPRESENT CONDITON OF SLAB*

For example a 90/10 slab would be 90% clear and 10% having either a streak, seam or broken corner.



DAKOTA MAHOGANY®

SLABS

MONUMENTAL

THICKNESS	\$/SQ FT
-----------	----------

4"	\$28
----	------

6"	\$38.50
----	---------

8"	\$48
----	------

12"	\$66.50
-----	---------

90/10

THICKNESS	\$/SQ FT
-----------	----------

4"	\$26.50
----	---------

6"	\$35.25
----	---------

8"	\$44.25
----	---------

12"	\$62
-----	------

80/20

THICKNESS	\$/SQ FT
-----------	----------

4"	\$24
----	------

6"	\$30.25
----	---------

8"	\$39
----	------

12"	\$53.75
-----	---------

**FRACTIONS REPRESENT CONDITON OF SLAB*

For example a 90/10 slab would be 90% clear and 10% having either a streak, seam or broken corner.



DAKOTA MAHOGANY®

TEST DATA

ASTM C 97

DENSITY..... 167 LBS/FT3

ABSORPTION..... 0.14 %

ASTM C 170

COMPRESSIVE STRENGTH..... 21,257 PSI

ASTM C 99

MODULUS OF RUPTURE..... 2,613 PSI

ASTM C 241

ABRASION RESISTANCE..... 57 HA

ASTM C 880


FLEXURAL STRENGTH.....1,598 PSI



SUPERIOR BLACK

Superior Black is one of our most popular granites. It is a medium black granite with a medium-grained texture that sandblasts and contrasts nicely. Superior Black is quarried in Minnesota and is priced competitively.

QUARRIED SUSTAINABLY IN
NORTHERN MINNESTOA

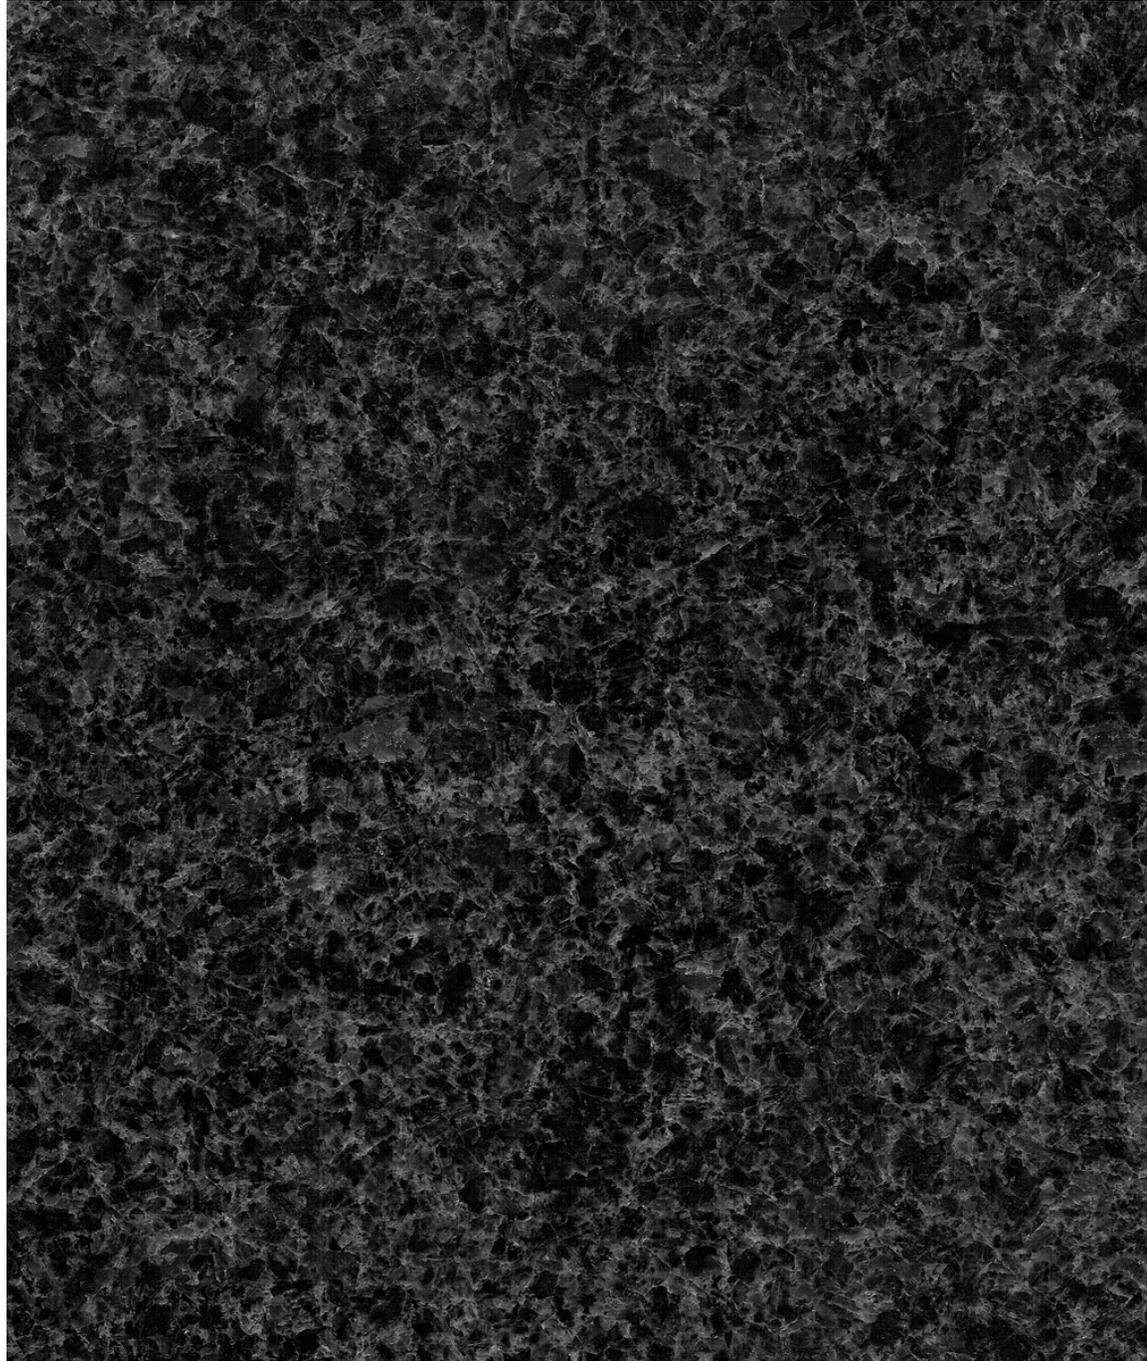


SUPERIOR BLACK

BLOCKS

MONUMENTAL

CALL FOR PRICING

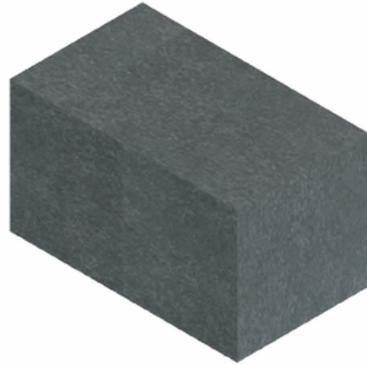

90/10


\$/CUBIC FOOT

\$37.75



**FRACTIONS REPRESENT CONDITON OF SLAB*

For example a 90/10 slab would be 90% clear and 10% having either a streak, seam or broken corner.

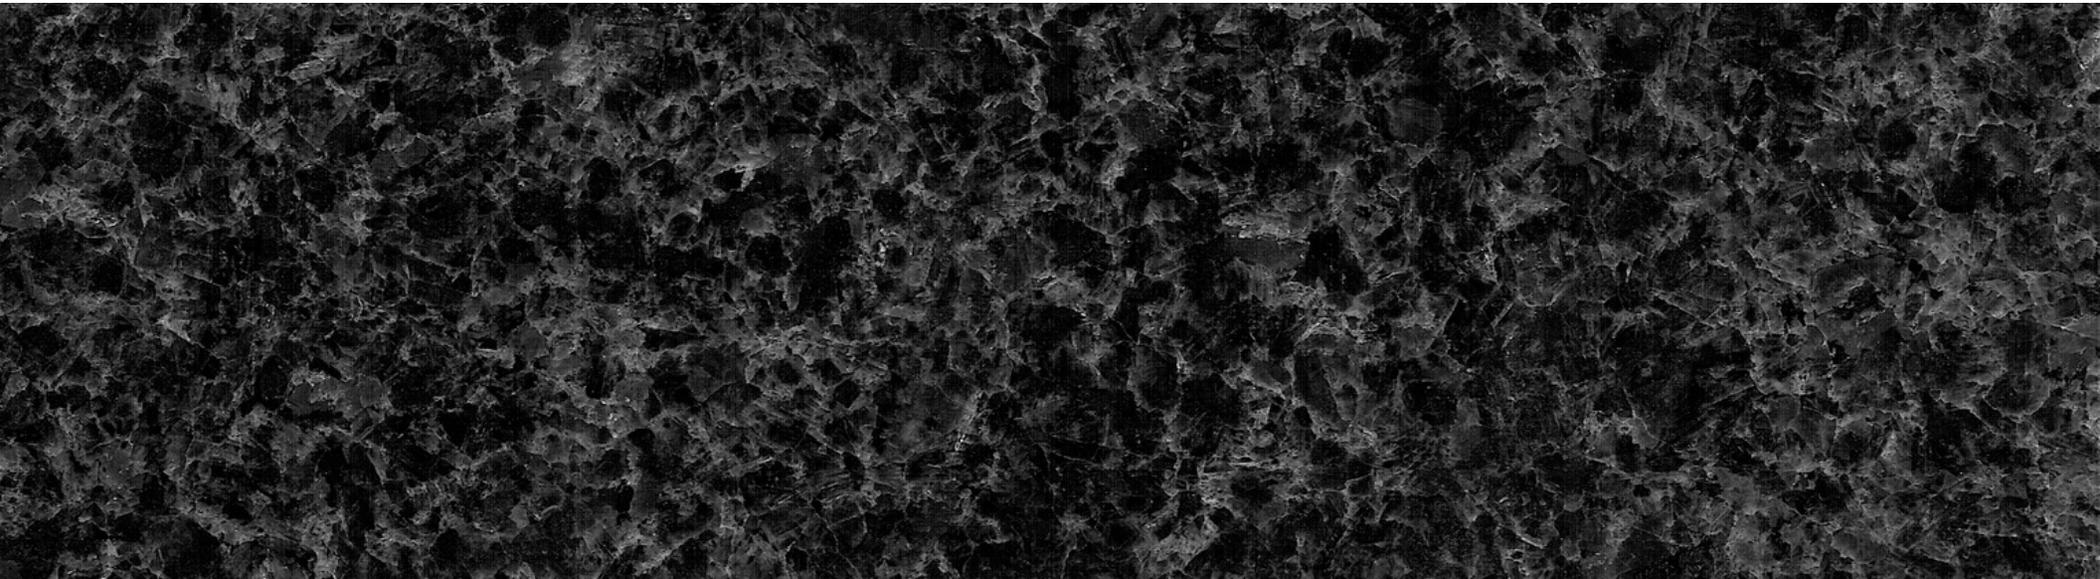

SUPERIOR BLACK


SLABS

THICKNESS	\$/SQ FT
4"	\$21.75
6"	\$28.75
8"	\$35
12"	\$47.75



**FRACTIONS REPRESENT CONDITON OF BLOCK*

For example a 90/10 slab would be 90% clear and 10% having either a streak, seam or broken corner.

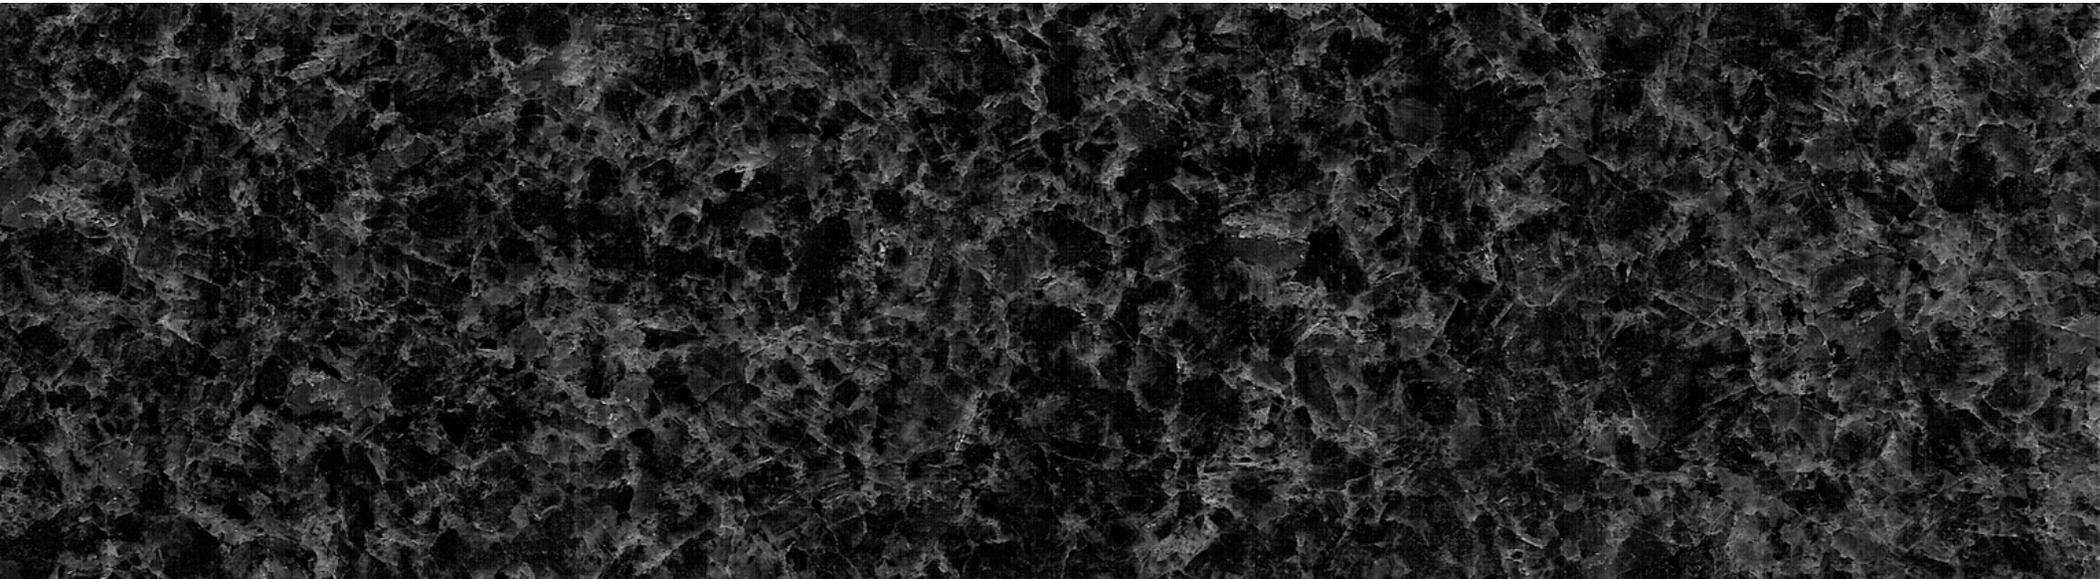

SUPERIOR BLACK

TEST DATA

ASTM C 97

DENSITY..... 178.1 LBS/FT3

ABSORPTION..... 0.14 %

ASTM C 170

COMPRESSIVE STRENGTH..... 26,800 PSI

ASTM C 99


MODULUS OF RUPTURE.....2,700 PSI

ASTM C 241

ABRASION RESISTANCE..... 28.7 HA

ASTM C 880

FLEXURAL STRENGTH.....2,400 PSI

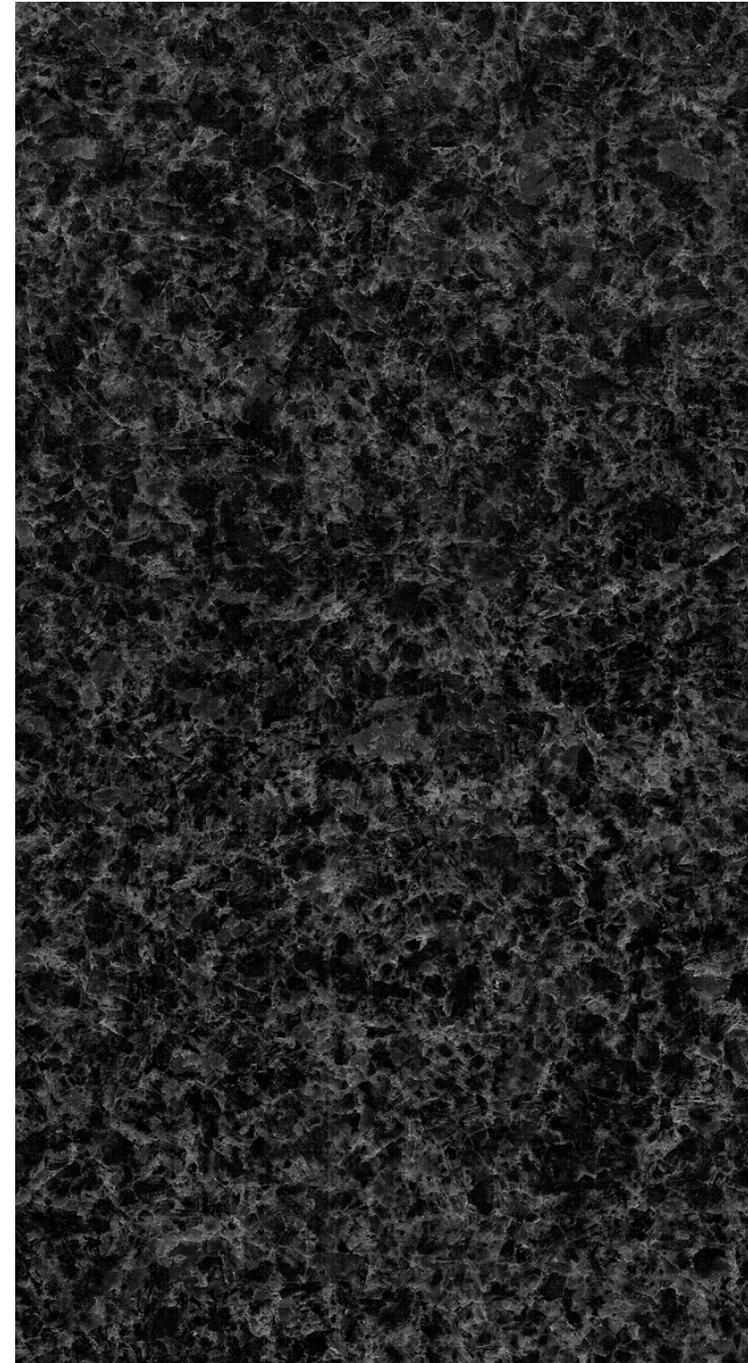



Dakota Granite
48391 150th Street
Milbank, South Dakota 57252

1-800-843-3333
www.dakotagranite.com

